



Essiccatori HAD HAD Hot air dryers



Abbinamenti - Combinations


Mod. HAD	30	50	75	100	150	200	300	400	600	800	1200	1500	2000	2500
Base fissaggio tramoggia Hopper fixing base	B10	B10	B20	B20	B20	B20	B30							
Carrello con ruote Trolley with wheels	C011	C011	C011	C011	C021	C021	C025	Incluso Included						
Supporto a terra Floor standing frame									Incluso Included	Incluso Included	Incluso Included	Incluso Included	Incluso Included	Incluso Included
Ruote per supporto a terra Wheels for floor standing frame									Optional	Optional	Optional			

Caratteristiche Tecniche - Technical Specifications

Mod. HAD		30	50	75	100	150	200	300	400	600	800	1200	1500	2000	2500
Portata aria/Airflow	m ³ /h	70	70	100	100	200	200	200	400	600	600	600	750	1000	1350
Temp. max/Max. temp.	C	140	140	140	140	140	140	140	140	140	140	140	140	140	140
Potenza risc./Heat. pow.	kW	1,6	1,6	2,4	2,4	3,6	3,6	3,6	9,6	12	12	12	27	27	40,5
Pot. soffiante/Blow. pow.	kW	0,08	0,08	0,18	0,18	0,37	0,37	0,37	0,75	1,1	1,1	1,1	8,5	8,5	12,5
Potenza totale/Total pow.	kW	1,68	1,68	2,58	2,58	3,97	3,97	3,97	10,35	13,1	13,1	13,1	35,5	35,5	53
Tensione/Voltage	V/Hz	230/50	230/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50	400/50
Volume/Volume	dm ³	30	50	75	100	150	200	300	400	600	800	1200	1500	2000	2500
Peso/Weight	kg	40	55	60	65	75	85	120	350	550	600	650	800	900	1000



HAD Essiccatori Hot air dryers HAD

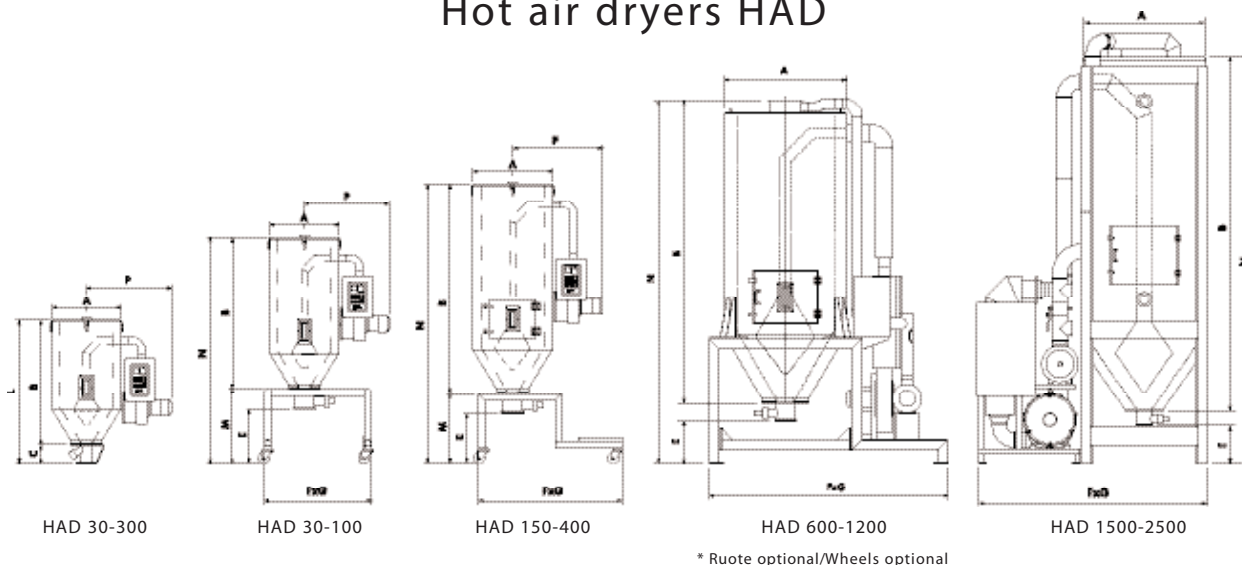

* Ruote optional/Wheels optional

Capacit essiccazione/Drying capacity kg/h

Materiale/Material	Tempo/Time h	Temp. C	HAD 30	HAD 50	HAD 75	HAD 100	HAD 150	HAD 200	HAD 300	HAD 400	HAD 600	HAD 800	HAD 1200	HAD 1500	HAD 2000	HAD 2500
ABS (extrusion grade)	4-5	80-90	4	7	10	14	21	28	41	55	83	110	165	206	275	344
ABS (molding grade)	3-4	80-90	6	9	14	18	28	37	55	73	110	147	220	275	367	458
CA	3-4	70	5	9	13	18	26	35	53	70	105	140	210	263	350	438
PA	5-6	70-80	4	6	9	12	18	24	36	48	72	96	144	180	240	300
P C	4-5	120	5	9	13	18	26	35	53	70	105	140	210	263	350	438
P E	1-2	85	17	28	41	55	83	110	165	220	330	440	600	750	1000	1350
PMMA	4	80	5	8	12	16	24	33	49	65	98	130	195	244	325	406
POM (homopolimer)	1-2	90-100	17	29	43	58	87	115	133	231	346	400	400	500	667	900
P P	1-2	80-90	15	25	38	50	75	100	133	200	300	400	400	500	667	900
PPO (or PPE)	3	100-120	6	9	14	18	28	37	55	73	110	147	220	275	367	458
P S	1	80-90	15	25	38	50	75	100	150	200	300	400	600	750	1000	1250
PUR	3	80-95	6	10	15	20	30	40	60	80	120	160	240	300	400	500
PVC	1	70-80	18	30	45	60	90	120	180	240	360	480	600	750	1000	1350
TPU	3	80-110	7	12	18	23	35	47	70	93	140	187	280	350	467	583

Dimensioni - Dimensions

Mod. HAD		30	50	75	100	150	200	300	400	600	800	1200	1500	2000	2500
Volume/Volume	dm ³	30	50	75	100	150	200	300	400	600	800	1200	1500	2000	2500
A	mm	437	437	516	516	597	597	832	832	992	992	1060	1060	1240	1240
B	mm	686	906	916	1126	1266	1556	1748	1998	2065	2476	3000	3200	3150	3660
C	mm	140	140	140	140	140	140	180	-	-	-	-	-	-	-
E	mm	400	400	400	400	370	370	400	400	344	344	525	385	395	395
F	mm	800	800	800	800	1075	1075	1075	1075	1940	1940	1940	2180	2366	2366
G	mm	675	675	675	675	820	820	820	820	1240	1240	1240	1306	1306	1306
L	mm	826	1046	1056	1266	1406	1696	1928	-	-	-	-	-	-	-
M	mm	560	560	560	560	525	525	535	555	-	-	-	-	-	-
N	mm	1246	1466	1476	1686	1791	2081	2303	2553	2565	2965	3670	3724	3929	4429
P	mm	455	455	644	644	710	710	850	791	-	-	-	-	-	-