



## Deumidificatori serie D803-D805 D803-D805 dessicant dryers




### Caratteristiche Tecniche - Technical Specifications

		D803	D804	D805
Portata aria/Air flow	m <sup>3</sup> /h	300	400	500
Temperatura processo Process temperature	NT °C	60-100	60-100	60-100
	MT °C	60-150	60-150	60-150
	HT °C	60-190	60-190	60-190
Dew point	°C	-40	-40	-40
Pressione statica/Static pressure	mbar	250	200	250
Pot. soff. proc./Blow. power of proc.	kW	3	4	5.5
Pot. soff. rigen./Blow. power of regen.	kW	0.2	-	-
Potenza riscaldamento processo Power heating process	NT kW	3.6	7.2	10.8
	MT kW	7.2	10.8	14.4
	HT kW	10.8	14.4	18
Pot. risc. rigen./Power heating regen.	kW	3.5	5	5
Potenza totale installata Installed power total	NT kW	10.3	16.2	21.3
	MT kW	13.9	19.8	24.9
	HT kW	17.5	23.4	28.5
Pot. media assor. a 80°C/Abs. med. pow. at 80°C	kW	6	7	8.5
Tensione/Voltage	V/Hz	400/50	400/50	400/50
Peso/Weight	kg	190	350	370



## Deumidificatori serie D803-805 D03-805 dessicant dryers

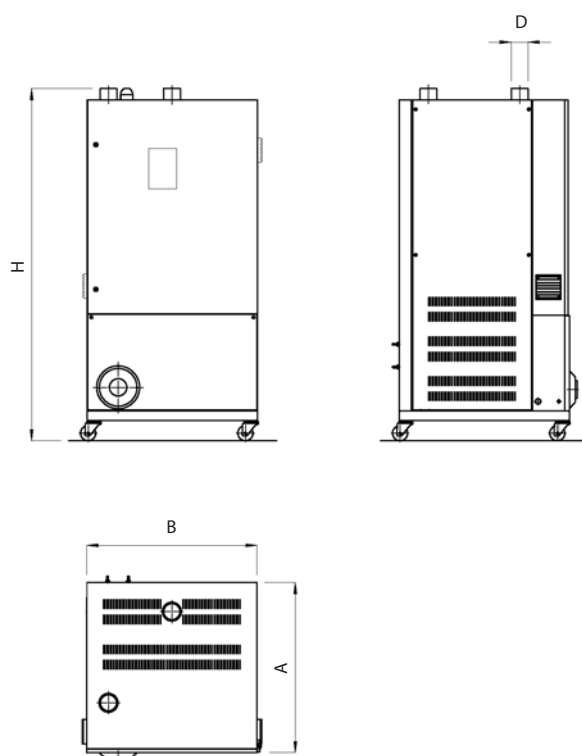

### Abbinamenti - Combinations

	D803	D804	D805
H600	•		
H800	•	•	
H1200		•	•
H1500			•

### Dimensioni - Dimensions

		D803	D804	D805
A	mm	900	900	900
B	mm	900	900	900
H	mm	1800	1800	1800
D	mm	63	89	89