




Granulatore compatto "SLIM" seire GSL Compact "SLIM" granulator GSL series





Granulatore compatto "SLIM" seire GSL Compact "SLIM" granulator GSL series

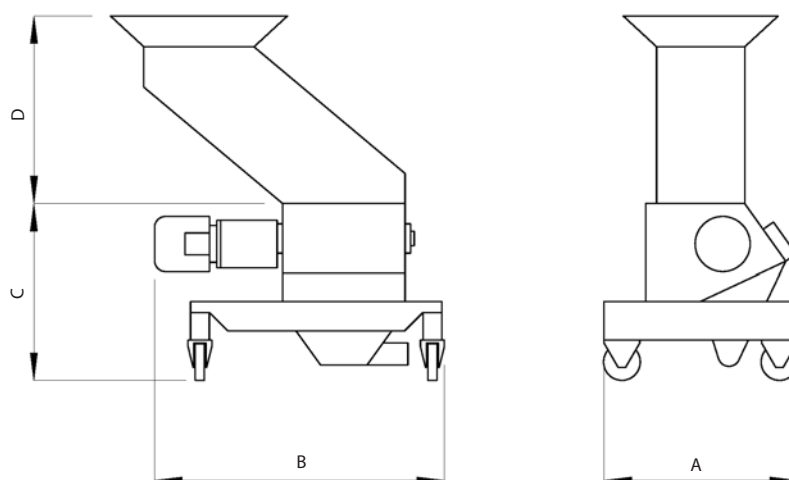

Dati Tecnici - Technical Data

		GSL 18/18	GSL 18/30	GSL 18/43	GSL 20/50*
Velocità rotore/Rotor speed	rpm	200	200	200	150
Lame rotanti/Rotating knives	n°	18	30	45	33
Lame fisse/Fixed knives	n°	2	2	2	2
Diametro rotore/Rotor diameter	mm	180	180	180	200
Larghezza rotore/Rotor width	mm	180	300	430	475
Fori griglia/Screen hols	mm	5-6-8	5-6-8	5-6-8	5-6-8
Bocca alimentazione Hopper feed throat	mm	350x350	350x350	430x270	540x240
Capacità cassetto raccolta Collecting box capacity	dm ³	11	13	15	15
Apertura camera di taglio Cutting chamber opening	mm	270x180	270x300	270x430	270x470
Pot. aspir./Suct. blow. power (opt)	kW	0,37	0,37	0,37	0,37
Potenza motore/Motor power	kW	3	4	4	4
Tensione/Voltage	V/Hz	400/50	400/50	400/50	400/50
Produzione/Productivity	kg/h	40÷60	50÷70	60÷80	90÷110
Dimensioni/Dimensions	A	420	420	420	510
	B	910	1030	1160	1120
	C	450	450	450	517
	D	820	820	900	700
Peso/Weight	kg	130	150	170	180

*Disponibile con aspiratore opz. / Available with Suction blower